

Light Tube

integrated driver

pendant lamp Light Tube 100

dimension: l= 2000mm ø100mm

or custom made length

type of protection: IP 21

LED 14,4W/m 12.000 lm




light color 2700 - 6000 K

suspension steel wire ø1,6 mm,

end caps brushed aluminium or coated,

light tube PMMA satinized

beam angle 360°

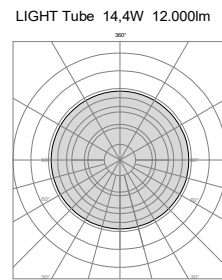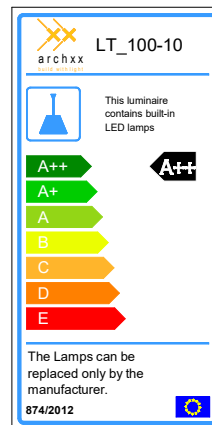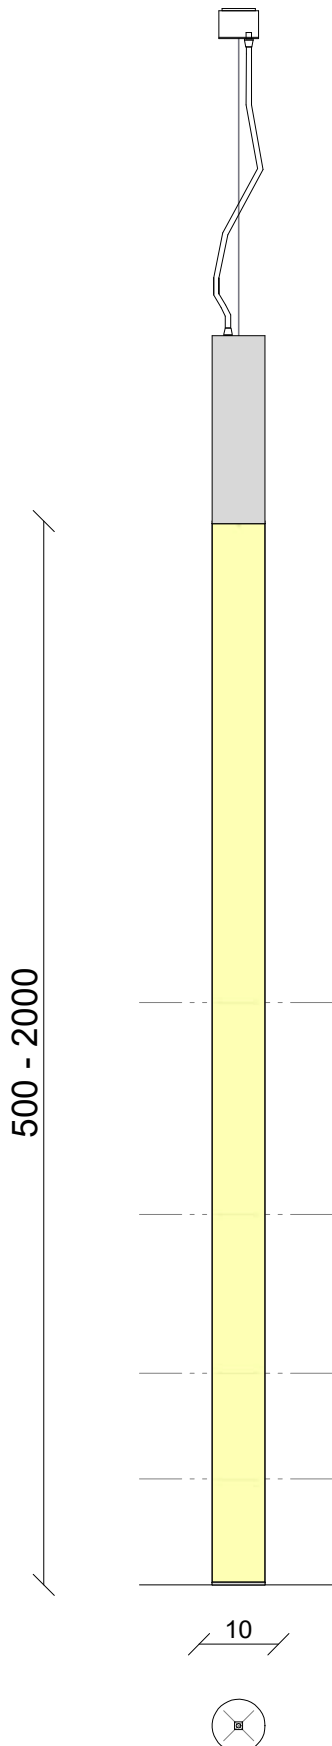

Requirements IDc1.5

(LEED v4 EBOM MRc4)

Reduced mercury in luminaires.

only mercury-free bulb LED.

-Requirements SSc8 (LEED CS v3)

use daylight control,

can be done externally.

Accessories: Power supply dimmable

DALI/Touch or special accessories.

